



**BELT SPECIFICATIONS**

Crimp Wire Size: 0.062 Inches [1.59 mm]  
 Spiral Wire Size: 0.062 Inches [1.59 mm]  
 Lateral Pitch: 0.4 Inches [10.2 mm]  
 Longitudinal Pitch: 0.5 Inches [12.7 mm]

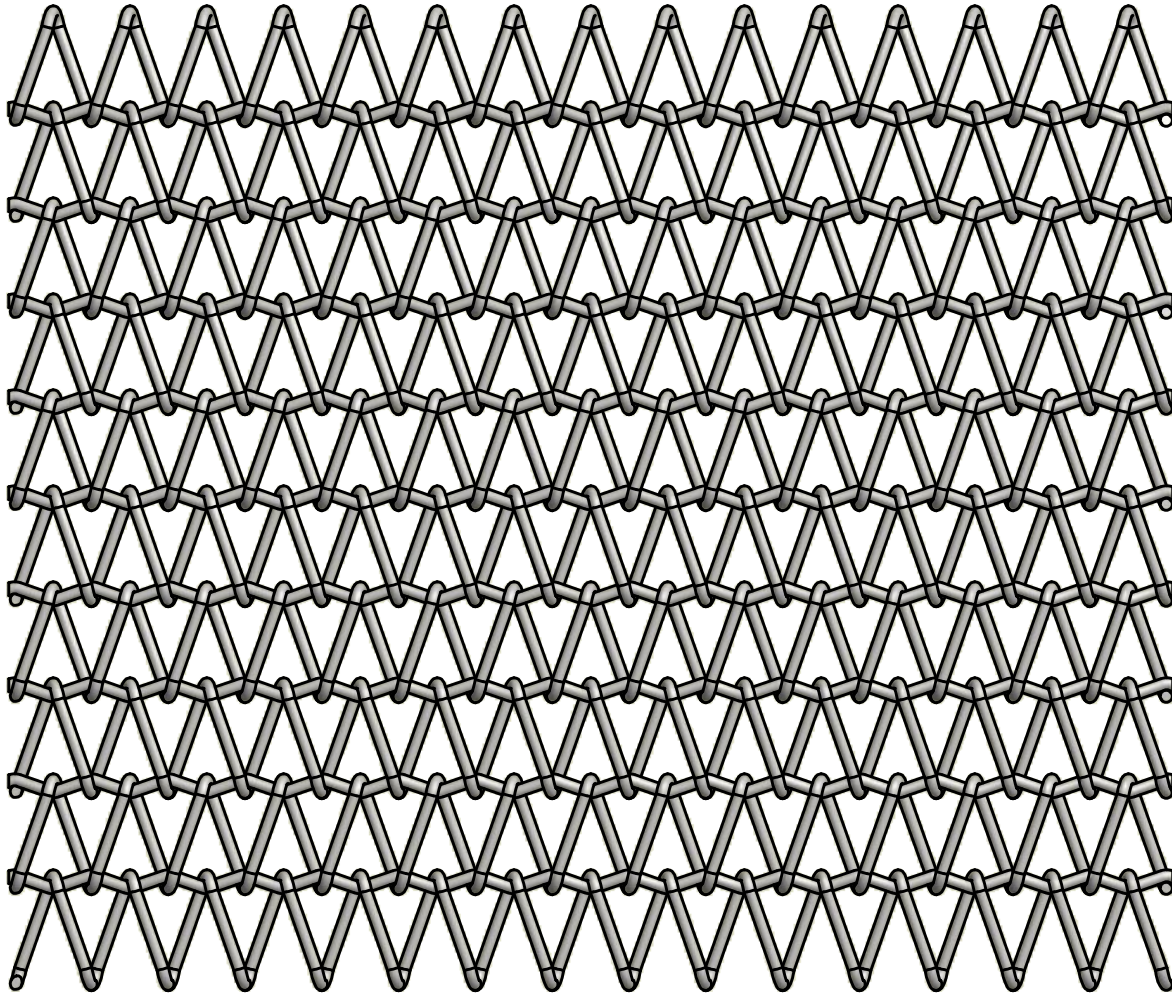

**DRAWN FULL SCALE**

DO NOT SCALE DRAWING		 <b>Ashworth</b> 450 ARMOUR DALE, WINCHESTER, VA 22601	<b>Ashworth Bros., Inc.</b> 450 ARMOUR DALE, WINCHESTER, VA 22601	
APPROVALS	DATE		TITLE	
DRAWN	witrinc	7/25/2013	<b>Cleatrac Belt CTB30-24-16</b>	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN <u>INCHES</u> . TOLERANCES: .X = ± .03      FRACTION ± 1/16 .XX = ± .015      ANGLES ± 1/2° .XXX = ± .005 .XXXX = ± .0005      SURF FINISH 63 ✓		SIZE	DWG. NO.	REV.
CAD/FILE NAME		<b>A</b>	<b>19-4019</b>	<b>B</b>
Balanced Weave Assy.idw		SCALE 1 : 1	CALC.WT N/A	SHEET 1 OF 1